

# DUNKER 20 – S

IP 20



**Application:** Regarding and excellent efficiency, the light fixtures are suitable for mounting in high areas.

**Body:** white painted steel sheet RAL 9003

**Reflector:** aluminium reflector from highly polished aluminium sheet MIRO SILVER® with medium luminous emittance characteristic (medium radiant)


**Fastening system:** suspension by means of brackets

**Применение:** просторы с высокими потолками благодаря отличным характеристикам по светоточдаче

**Корпус:** листовая сталь белой покраски RAL 9003


**Отражатель:** полированный алюминиевый параболический MIRO SILVER® со средней характеристикой излучения

**Система крепления:** навесная с помощью фиксаторов

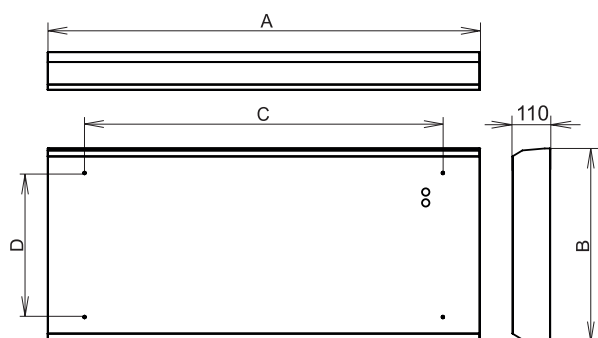

| – electronic ballast / электронный дроссель |                                             |        |  |                         |
|---------------------------------------------|---------------------------------------------|--------|--|-------------------------|
| 56640                                       | DUNKER20-S-228-EP, 2x28W                    |        |  | 1185 x 275 x 995 x 140  |
| 56641                                       | DUNKER20-S-254-EP, 2x54W                    |        |  | 1185 x 275 x 995 x 140  |
| 56642                                       | DUNKER20-S-235-EP, 2x35W                    |        |  | 1485 x 275 x 1295 x 140 |
| 56643                                       | DUNKER20-S-249-EP, 2x49W                    |        |  | 1485 x 275 x 1295 x 140 |
| 56644                                       | DUNKER20-S-280-EP, 2x80W                    |        |  | 1485 x 275 x 1295 x 140 |
| 56645                                       | DUNKER20-S-428-EP, 4x28W                    |        |  | 1185 x 535 x 995 x 400  |
| 56646                                       | DUNKER20-S-454-EP, 4x54W                    |        |  | 1185 x 535 x 995 x 400  |
| 56647                                       | DUNKER20-S-435-EP, 4x35W                    | T16/G5 |  | 1485 x 535 x 1295 x 400 |
| 56648                                       | DUNKER20-S-449-EP, 4x49W                    |        |  | 1485 x 535 x 1295 x 400 |
| 56649                                       | DUNKER20-S-480-EP, 4x80W                    |        |  | 1485 x 535 x 1295 x 400 |
| 56650                                       | DUNKER20-S-628-EP, 6x28W                    |        |  | 1185 x 795 x 995 x 660  |
| 56651                                       | DUNKER20-S-654-EP, 6x54W                    |        |  | 1185 x 795 x 995 x 660  |
| 56652                                       | DUNKER20-S-635-EP, 6x35W                    |        |  | 1485 x 795 x 1295 x 660 |
| 56653                                       | DUNKER20-S-649-EP, 6x49W                    |        |  | 1485 x 795 x 1295 x 660 |
| 56654                                       | DUNKER20-S-680-EP, 6x80W                    |        |  | 1485 x 795 x 1295 x 660 |
| – special accessories / спец.оснащение      |                                             |        |  |                         |
| 003576                                      | suspension bracket M5/ навесная петля M5    |        |  |                         |
| 004749                                      | Snap-hook 6030 (zinc) / карабин 6030 (цинк) |        |  |                         |

DUNKER20-S 4x80W, IP65



DUNKER20-S-WR 4x80W, IP65

