

DUNKER 20 – H

IP 20



Application: Regarding an excellent efficiency, the light fixtures are suitable for mounting in high areas.

Body: white painted steel sheet RAL 9003

Reflector: aluminium reflector from highly polished aluminium sheet MIRO SILVER® with medium luminous emittance characteristic (medium radiant)


Fastening system: suspension by means of brackets

Применение: просторы с высокими потолками благодаря отличным характеристикам по светоотдаче

Корпус: листовая сталь белой покраски RAL 9003

Отражатель: полированный алюминиевый параболический MIRO SILVER® со средней характеристикой излучения

Система крепления: навесная с помощью фиксаторов

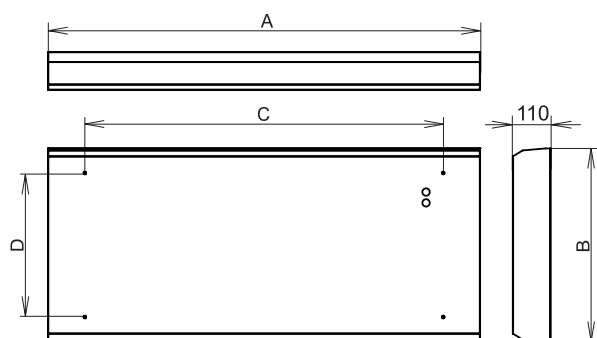

– electronic ballast / электронный дроссель			
56600	DUNKER20-H-228-EP, 2x28W		1185 x 195 x 980 x 100
56601	DUNKER20-H-254-EP, 2x54W		1185 x 195 x 980 x 100
56602	DUNKER20-H-235-EP, 2x35W		1485 x 195 x 1175 x 100
56603	DUNKER20-H-249-EP, 2x49W		1485 x 195 x 1175 x 100
56604	DUNKER20-H-280-EP, 2x80W		1485 x 195 x 1175 x 100
56605	DUNKER20-H-428-EP, 4x28W		1185 x 375 x 980 x 280
56606	DUNKER20-H-454-EP, 4x54W		1185 x 375 x 980 x 280
56607	DUNKER20-H-435-EP, 4x35W	T16/G5	1485 x 375 x 1175 x 280
56608	DUNKER20-H-449-EP, 4x49W		1485 x 375 x 1175 x 280
56609	DUNKER20-H-480-EP, 4x80W		1485 x 375 x 1175 x 280
56610	DUNKER20-H-628-EP, 6x28W		1185 x 555 x 980 x 460
56611	DUNKER20-H-654-EP, 6x54W		1185 x 555 x 980 x 460
56612	DUNKER20-H-635-EP, 6x35W		1485 x 555 x 1175 x 460
56613	DUNKER20-H-649-EP, 6x49W		1485 x 555 x 1175 x 460
56614	DUNKER20-H-680-EP, 6x80W		1485 x 555 x 1175 x 460

– special accessories/ спец.оснащение

003576	suspension bracket M5/ навесная петля M5
004749	Snap-hook 6030 (zinc) / карабин 6030 (цинк)

DUNKER20-H 4x54W, IP65

