

DUNKER 20

IP 20



Application: Regardingand excellent efficiency, the light fixtures are suitable for mounting in high areas.

Body: white painted steel sheet RAL 9003

Reflector: aluminium reflector from highly polished aluminium sheet MIRO SILVER® with medium luminous emittance characteristic (medium radiant)


Fastening system: suspension by means of brackets

Применение: просторы с высокими поолками благодаря отличным характеристикам по светоотдаче

Корпус: листовая сталь белой покраски RAL 9003

Отражатель: полированный алюминиевый параболический MIRO SILVER® со средней характеристикой излучения

Система крепления: завесная с помощью фиксаторов

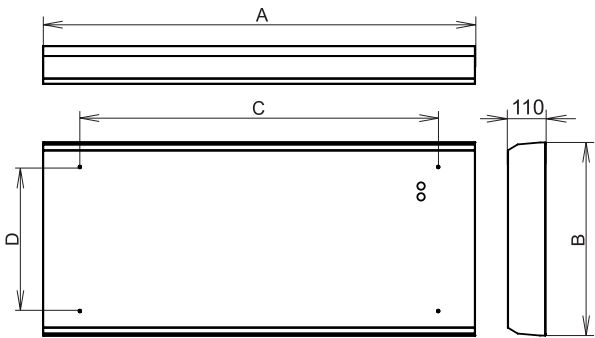

– electronic ballast / электронный дроссель			
56620	DUNKER20-228-EP, 2x28W		1185 x 215 x 980 x 115
56621	DUNKER20-254-EP, 2x54W		1185 x 215 x 980 x 115
56622	DUNKER20-235-EP, 2x35W		1485 x 215 x 1175 x 115
56623	DUNKER20-249-EP, 2x49W		1485 x 215 x 1175 x 115
56624	DUNKER20-280-EP, 2x80W		1485 x 215 x 1175 x 115
56625	DUNKER20-428-EP, 4x28W		1185 x 410 x 980 x 310
56626	DUNKER20-454-EP, 4x54W		1185 x 410 x 980 x 310
56627	DUNKER20-435-EP, 4x35W	T16/G5	1485 x 410 x 1175 x 310
56628	DUNKER20-449-EP, 4x49W		1485 x 410 x 1175 x 310
56629	DUNKER20-480-EP, 4x80W		1485 x 410 x 1175 x 310
56630	DUNKER20-628-EP, 6x28W		1185 x 605 x 980 x 505
56631	DUNKER20-654-EP, 6x54W		1185 x 605 x 980 x 505
56632	DUNKER20-635-EP, 6x35W		1485 x 605 x 1175 x 505
56633	DUNKER20-649-EP, 6x49W		1485 x 605 x 1175 x 505
56634	DUNKER20-680-EP, 6x80W		1485 x 605 x 1175 x 505
– special accessories/ спец.оснащение			
003576	suspension bracket M5/ завесная петля M5		
004749	Snap-hook 6030 (zinc) /карабин 6030 (цинк)		

DUNKER20-4x54W, IP65

